

iReach Magnum specifications

Device Code	Staple Line Length	Shaft Length	Max Firings
IM60AL	60mm	448mm	12
IM45AL	45mm	432mm	
IM60AM	60mm	348mm	
IM45AM	45mm	332mm	
IM60AS	60mm	298mm	
IM45AS	45mm	282mm	

Compatible Reload specifications

Product Code	Product Code	Cartridge Color	Closed Staple Height	Number of staple rows	QTY / BOX
REC45WHT	45mm	White	1.0mm	6	12
REC60WHT	60mm				
REC45BLU	45mm	Blue	1.5mm		
REC60BLU	60mm				
REC45GLD	45mm	Gold	1.75mm		
REC60GLD	60mm				
REC45GRN	45mm	Green	2.0mm		
REC60GRN	60mm				
REC45BLK	45mm	Black	2.2mm		
REC60BLK	60mm				



iReach Magnum

Powered Endoscopic
Linear Stapler

販売名：iREACH Magnumステープラ
認証番号：307AABZX00025000

販売名：iREACH Magnumリロード
承認番号：30700BZX00075000



Ergonomic Design
55 ° articulation



Optimized
Compression




Optimized
Firing



Cutting-Edge
Technology

Product Features

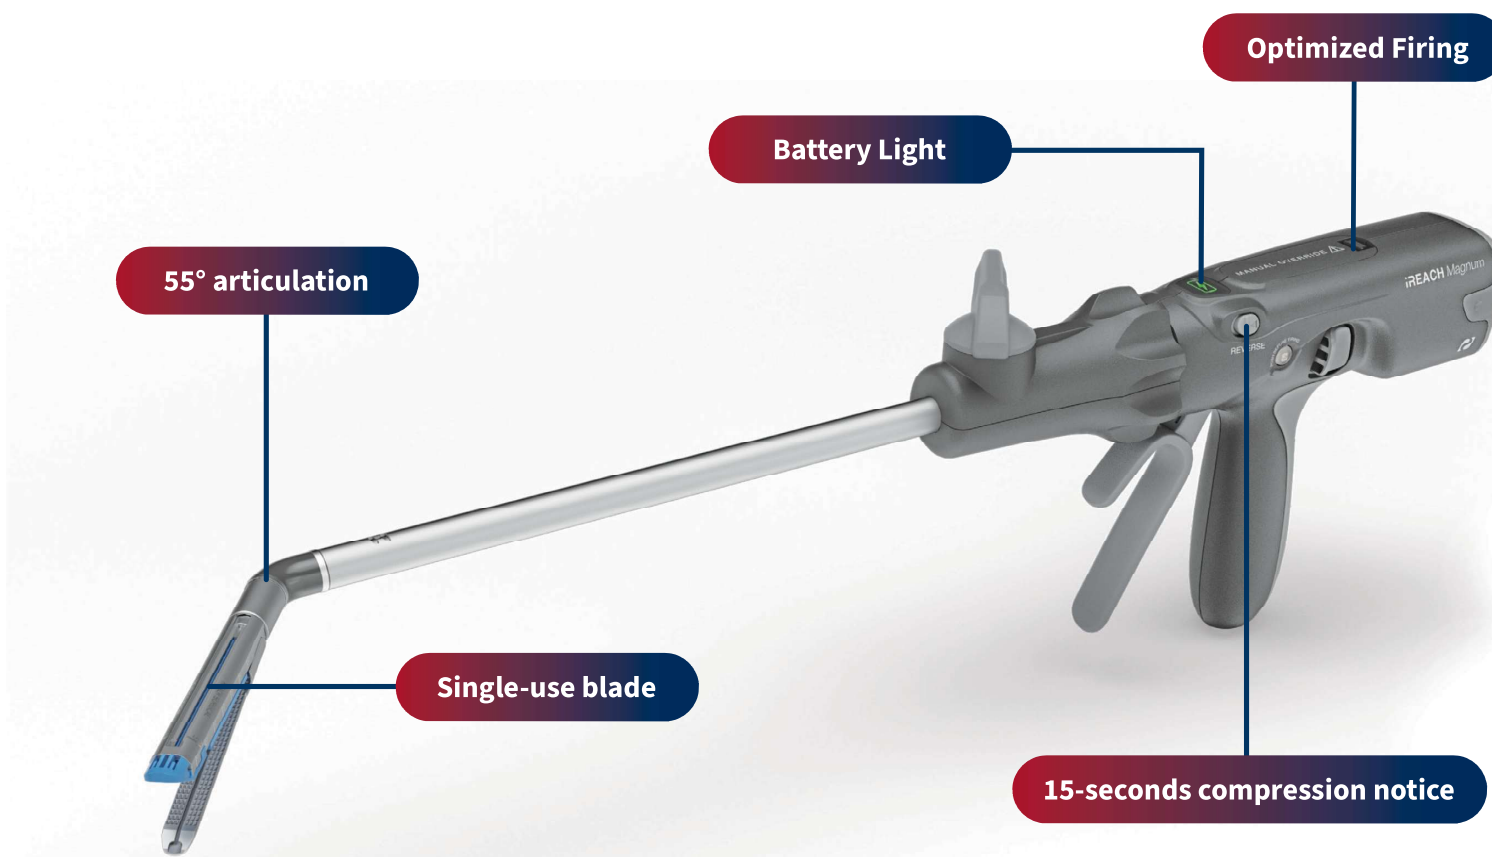

Ergonomic Design



5段階で左右方向に最大55°の可動領域。



バッテリーインジケータは、バッテリーの状態を表示します。



アーキュレーションレバーを使用して角度を調整することが可能です。

Optimized Compression



15秒間の予備圧縮が完了すると、音声フィードバックが鳴ります。



安全解除ボタンは発射を防止し、安全性を高めます。



適正な圧縮力により、良好なステープル形成を実現します。

Optimized Firing

12 firings

バッテリーは、最大12回のスムーズな発射を可能にします。



Cutting-Edge Technology

45mmまたは60mmのステープルライン長で幅広いリロード。全てのリロードは12mmトロカーに適合します。



5種類のステープルの高さにより、あらゆる手術状況に対応し、より細かい選択が可能になります。



単回ナイフがリロードに内蔵されている事により、組織感染のリスクの軽減が期待出来ます。